DOMUS

WINNING THE FUTURE THROUGH INNOVATION

DLM-22
ESSENTIAL dryers

ELECTRONIC PROGRAMMER

M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

Reversing drum action as standard.
Galvanised steel drum.
Frequency inverter as standard.

EFFICIENCY

Big fluff filter.

VERSATILITY

Make to order - customisation.
OPL > Coin laundry - Standard OPL model easily trasformable to coin laundry.

ERGONOMICS

Biggest door diameters.
Opening sense of door adjustable on site.

MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians and maintenance with external console (with console option).
Easy to access to components.

OTHERS

White painted panels.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: electric or gas.
CE approved

OPTIONS

- Natural gas heated tumble dryer
- Opposite door opening
- Back panel with air filter
- M programmer display
- Maritime wooden packing DLM-22
- 400V 3N 60 Hz DLM-11-35
- 230V 3~ 50 Hz DLM-22/28/35 E
- 230V 3~ 60 Hz DLM-22/28/35 E
- 230V 3~ 60 Hz DLM-35 G/S
- 440/480V 3~ 60 Hz DLM-22/28/35
- Several payment systems for self-service

CAPACITY & DRUM	UNIT.	DLM-22	
Capacity 1/18	Kg	24,4	
	lb	53,9	
Capacity 1/20	Kg	22,0	
	lb	48,5	
Ø Drum	mm	835	
	inch	32,87	
Drum length	mm	800	
	inch	31,5	
Drum volume	l	440	
	cu ft	15,54	
Ø Door hole	mm	574	
	inch	22,60	
Door center height	mm	1.030	
	inch	40,55	
Height from floor to bottom of door	mm	672	
	inch	26,46	
ELECTRIC HEATING			
Evaporation capacity	L/h	17	
	US gallon/h	4,5	
Hourly output	Kg/h	34	
	lb/h	75	
Installed heating power	kW	24	
Installed electrical power	kW	24,97	
GAS HEATING			
Evaporation capacity (gas model)	L/h	20	
	US gallon/h	5,283	
Hourly output (gas model)	Kg/h	40	
	lb/h	88,2	
Installed gas heating power	kcal/h	26655	
	Btu/h	105776	
Installed gas heating power	kW	31	
Installed electrical power	kW	0,97	
Instant propane gas consumption (G31)	Kg/h	2,66	
	lb/h	5,86	
Instant natural gas consumption (G20)	m³/h	3,28	
	cfm	1,93	
Ø Gas inlet	BSPP ISO 228-1	1/2"	
POWER AND VENTILATION			
Drum motor power	kW	0,37	
Fan motor power	kW	0,55	
Nominal air flow rate	m³/h	1.200	
	cfm	706	
Ø Fume exhaust	mm	200	
	inch	7,87	
HEAT EMISSION			
Maximum total heat emission	kW	2,4	
	Btu/h	8194	
Max. front heat emission	kW	1,7	
	Btu/h	5736	
CONNECTIONS		E	G / S
Tension 230V - I + N + T	Nº x mm² / A	-	3 x 1,5 / 16A
Tension 230V - III + T	Nº x mm² / A	4 x 25 / 80A	3 x 1,5 / 16A
Tension 400V - III + N + T	Nº x mm² / A	5 x 10 / 40A	3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING			
Net / gross width	mm	890 / 970	
	inch	35 / 38,2	

Net / gross depth	mm	1.255 / 1.345
	inch	49,4 / 53
Net / gross height	mm	1.812 / 1.940
	inch	71,3 / 76,4
Net / gross weight	Kg	210 / 230
	lb	463 / 507
OTHERS		
Sound level	dB	65

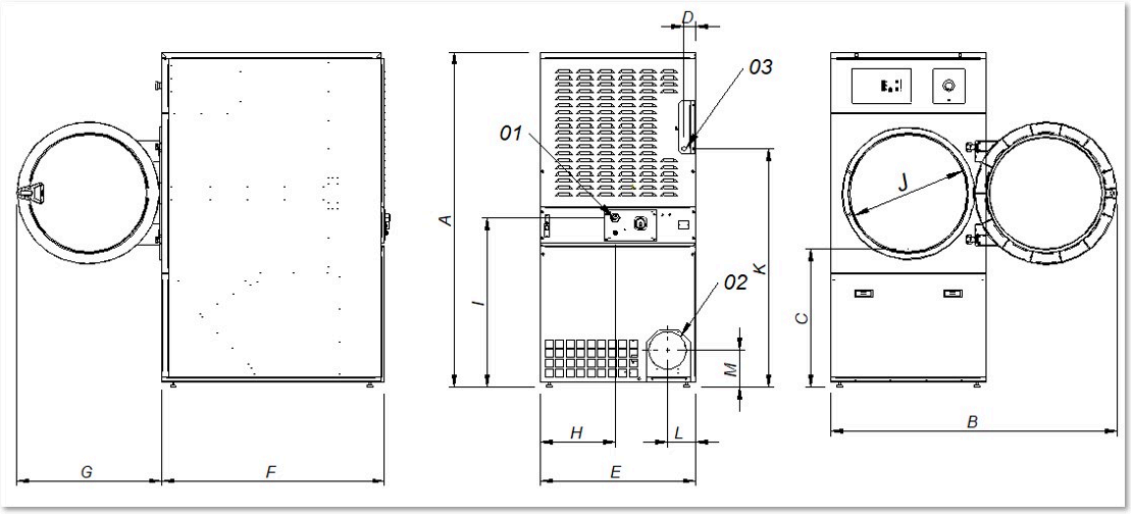

01 Power supply
02 Fumes output Ø 200
03 Gas inlet 1/2”

	A	B	C	D	E	F	G	H	I	J	K	L	M
DLM-18	1.694	1.447	689	68	785	1.125	735	380	870	575	1.226	133	180
DLM-22	1.812	1.552	743	112	890	1.255	735	107	920	575	1.344	238	180